

EZIBLANK®

Blanking Panels

Cost Effective Blanking Panel Solution

EZIBLANK® is a cost effective way of improving your PUE by preventing unwanted air recirculation within the 19" rack.

EZIBLANK® keeps hot exhaust air away from cool intake air, extending the life of IT equipment, saving energy and reducing the carbon footprint of the data centre.

EZIBLANK® blanking panels are supplied in 6U sheets and can be snapped at 1U intervals allowing them to fit the required amount of unused rack space.



Features & Benefits

- EZIBLANK® prevents hot air recirculation, which is one measure that helps improve CRAC unit efficiency.
- 6U panels can be split at 1U intervals.
- EZIBLANK® panels are designed and manufactured to the highest international standards.
- Great for the environment, EZIBLANK® panels are reusable, recyclable and flame retardant.
- Tool-less installation thanks to innovative 'pop-in clip'.

The innovative 'pop-in clip' allows the panels to be installed or removed in seconds without the need for screws or tools.

Easy To Use

- Simply snap off the number of panels needed.

Simple To Install


- No screws or tools needed.

Saves Money & Environmentally Friendly

- Saving energy, cuts costs and is good for the environment, as only recyclable plastic is used.

Fits Any 19" Rack Space

- Size each panel to suit the required space.

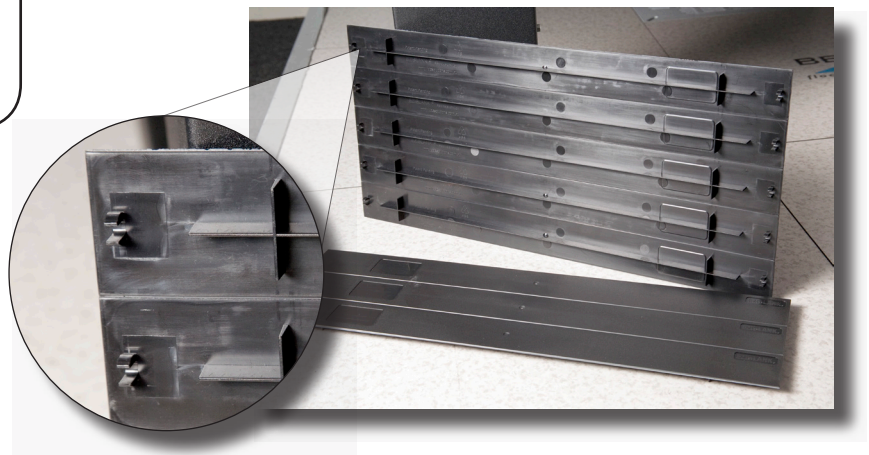

Installation Instructions



EZIBLANK® Installation, 6 x 1U Panel



Place the panel in the required position and align the clips with 19" mounting holes



Push the clips firmly into position on each side



Easy selection of individual panel combinations. Firmly bend along desired position...



...fold backward and "snap" off as required.



Insert the adjusted panel to fill the remaining open rack space.

Specifications

Part Number:

- 46-EZIBLANK - 10 x 6U Panels, black.

Size:

- 19" EIA x 6RU.
- Snaps off to six 19" EIA x 1RU.

Fits:

- 19" Wide EIA-310D compliant equipment mounting rails.
- 44.45RU Hole spacing (15.9mm x 15.9mm x 12.7mm).

Dimensions:

- 482mm (W) x 266.7mm (H) x 1.8mm (D).

Shipping Weight:

- 10 x 6RU Panels = 3.5Kgs

Certifications:

- ANS UL 94 V-0.
- UL file number E183535.

Material:

- Acrylonitrile Butadiene Styrene (ABS).
- Meets UL 94 V-0 standard.

Construction:

- Moulded.

Finish:

- Textured - Available in black only.