



# EziBlank Wall 300

Installation Instruction ver 1.0

## Checklist



Fastener ( 4 x Plastic screw and 4 x Metal split pin




EziBlank Wall 300 - Form A




EziBlank Wall 300 - Form B

There are two form factors of EziBlank Wall 300 - Form A & B, both panels will fold into the same 300mm plenum using the same procedure.


## Step 1: Prepare the panel for folding #1



Lay the panel down on a clean surface, with the printed side facing down




Starting from the right hand side, fold the right panel in until it presses down onto the panel body.



Apply pressure along the edge of the fold, the folded panel shall now settle into the position but slightly bounced back

## Step 2: Prepare the panel for folding #2

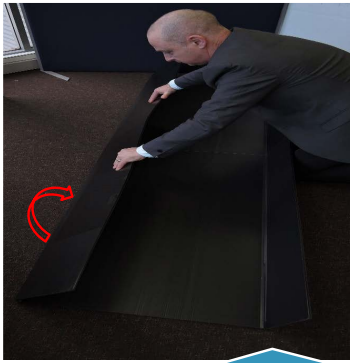


Repeat the same process to the left panel



With both left & right panels now tending inward, with one hand holding the left panel, roll the right panel toward the left panel to form a triangle plenum

## Step 3: Align & mate the embedded velcros

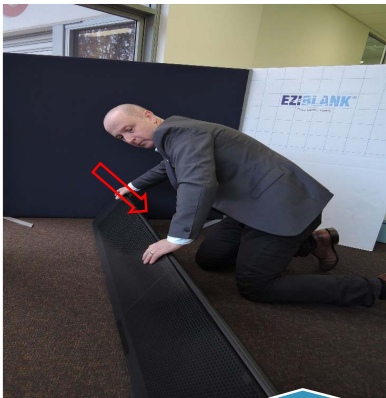

Starting from one end, align the embedded velcros and press them in firmly until the velcros are mated together.




Repeat the process to the middle and the opposite end of the panel.

## Step 4: Option 1 - Apply plastic fasteners




Use the supplied plastic screw fastener, position it 20mm inside the printed area, use a Philips screwdriver and pierce the screw into the panel and then start turning clockwise.

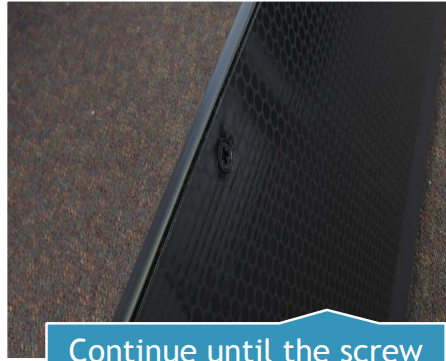


Continue until the screw head is flushed to the panel

## Step 4: Option 2 - Apply metal split pins

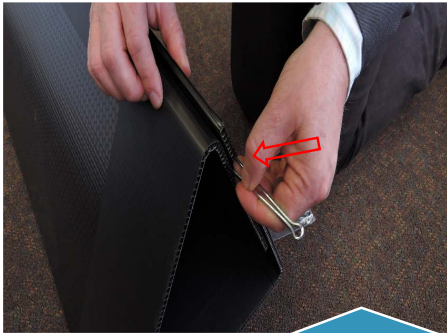

Split open the metal split pin slightly until each part can fit into the a furrow cavity of both panels.

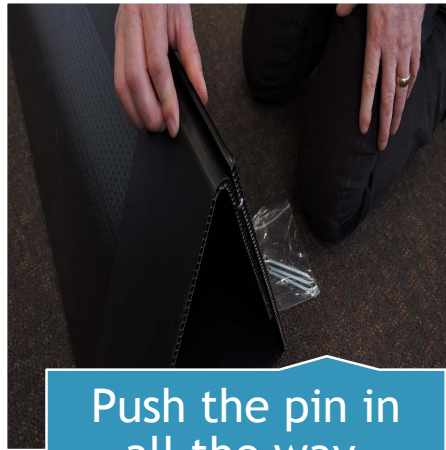


Push the pin in all the way.

## Step 5: Repeat Step 4 to the opposite end




Use the supplied plastic screw fastener, position it 20mm inside the printed area, use a Philips screwdriver and pierce the screw into the panel and then start turning clockwise.




Continue until the screw head is flushed to the panel

OR



Split open the metal split pin slightly until each part can fit into the a furrow cavity of both panels.



Push the pin in all the way.

### Plastic Screw

### Metal Pin





## Step 6: Erect the EziBlank Wall 300 and inspect



Erect the Wall and check that all sides of panel are securely fasten.



Assembly completed